

Quick Ship

In Stock and Ready to Ship



six degrees
FLOORING SURFACES™



Premium
build
Made in
the USA



Quick Ship PROGRAM

The Quick Ship collection was created for the fast-paced project world, where finding the right product quickly is the highest priority. Available in both 2 mm/6 mil and 3 mm/20 mil options, we guarantee a minimum quantity of 25,000 SF in stock at all times. Why wait weeks for your flooring to arrive when you can have it now? With the Quick Ship Collection, you're just a few steps away from *the floor you need when you need it!*

you're



just



a



few



steps



away



Quick Ship 2 mm Plank + Tile

3 mm Plank



QP217_C09

Washy Oak



QP220_C03

Natural Oak



QP233_C62

European Oak



QP190_C16E

Antique Pine



QP311_C05

Weathered Pine




QP231_C13

Classic Oak



QP251_C12

Golden Oak

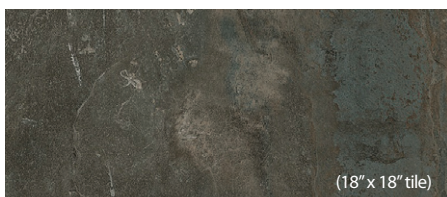

QT375_C01

Simply Urban



QP324_C05

Heritage Oak



QP190_C16A

Antique Pine



QP251_C15

Modern Oak



QP195_C20

Country Oak



QP182_C05

Chestnut

2 MM

QUICK SHIP 2 MM PLANK SPECIFICATIONS

Nominal Dimensions: 6" x 48" x 2 mm plank
Finish: Embossed 6 mil
Quantity Per Carton: 27 planks (6" x 48")
Sq. Ft. Per Carton: 54 sq. ft./carton

2 MM

QUICK SHIP 2 MM TILE SPECIFICATIONS

Nominal Dimensions: 18" x 18" x 2 mm tile
Finish: Embossed 6 mil
Quantity Per Carton: 24 tiles (18" x 18")
Sq. Ft. Per Carton: 54 sq. ft./carton

2 MM / 3 MM FEATURES

- FloorScore® Certified
- Ceramic Reinforced UV-Cured Urethane Finish (3 mm only)
- Extremely Durable
- Excellent Indentation Resistance
- Excellent Chemical Resistance
- Excellent Slip Resistance
- 100% Recyclable



2 MM / 3 MM TEST INFORMATION

LEED v2009 MR Credit 6 RRM Content: 12%
LEED v2009 IEQ Credit 4.1: Qualifies
LEED v2009 IEQ Credit 4.3: Qualifies
ASTM F 1700 – Solid Vinyl Tile: Class III, Type A & B
ASTM E 648 – Critical Radiant Flux: Class I, >.45 W/cm2
ASTM E 662 – Smoke Density: Passes, <450
CAN/ULC-S102.2 – Surface Burning: 50 FSR, 150 SDC
ASTM D 2047 – Slip Resistance: >0.60
ASTM F 970 – Static Load Limit: Passes, > 250 PSI
ASTM F 925 – Chemical Resistance: Excellent (chart available)
ASTM F 1515 – Light Stability: Passes
ASTM F 1914 Residual Indentation: Passes
ASTM F2199 Dimensional Stability: Passes
Acclimation Time: 48 Hours

WARRANTY

- 2 mm – 10-Year Residential Warranty
- 3 mm – 15 Year Commercial Warranty

3 MM

QUICK SHIP 3 MM PLANK SPECIFICATIONS

Nominal Dimensions: 6" x 48" x 3 mm plank
Finish: Embossed 20 mil
Quantity Per Carton: 18 planks (6" x 48")
Sq. Ft. Per Carton: 36 sq. ft./carton



six degrees

FLOORING SURFACES™

931 South Springville Avenue • Fostoria, Ohio 44830 • 844-432-5885

For the most current and complete technical, installation and maintenance information, please visit sixdegreesflooring.com